



Larsen's®

Vista Series Fire Extinguisher Cabinets Submittal and Detail Sheet

PROJECT: _____

MODEL NUMBER: _____

ARCHITECT: _____


DATE: _____

LOCATION: _____

QUANTITY: _____

CONTRACTOR: _____

DISTRIBUTOR: _____

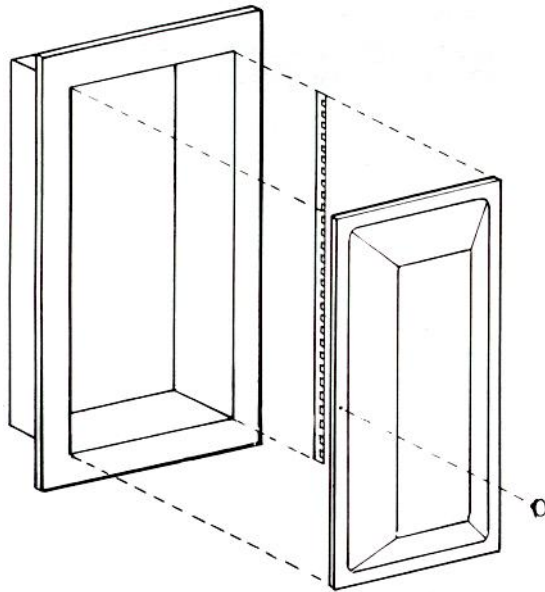

SPECIFICATIONS:


"VISTA" denotes a frameless door with color and design options as outlined below. The door is constructed of clear acrylic. The unique door design provides a 180° view of the fire extinguisher. The extinguisher is supported by the manufacturer's standard bracket.

BOX SPECIFICATION:

All recessed and surface-mounted steel cabinets have a white baked enamel box. Surface-mounted cabinets with aluminum trim have a box constructed entirely of clear or color anodized aluminum. Surface-mounted cabinets with stainless steel trim have a box constructed entirely of 304 stainless steel with a #4 finish.

TRIM SPECIFICATION:

The standard trim material is steel, and optional materials include both aluminum and stainless steel. All units come equipped with a chrome plated pull knob, magnetic catch, and continuous piano hinge. The standard VISTA bubble is clear acrylic and red acrylic is available as an option, if specified. Steel trims are one piece, constructed of cold-rolled steel with a standard finish of white baked enamel, which can be used as either a finish or prime coat. Aluminum trims are constructed of extruded aluminum with satin anodized finish. Clear anodized is standard, and a wide selection of optional color anodized finishes is available. To specify aluminum trim, use the prefix "AL" before the cabinet model number. Stainless steel trims are one piece, constructed of #4 finish, 304 stainless steel. To specify stainless steel trim, use the prefix "SS" before the cabinet model number.

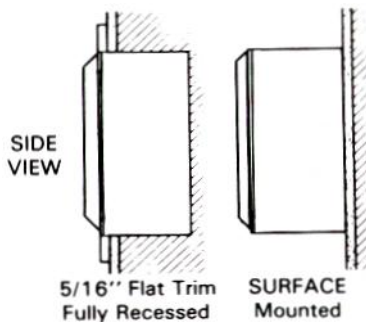

TRIM MATERIAL

- ☐ Steel
- ☐ Aluminum (AL)
- ☐ Stainless (SS)
- ☐ Other (specify) _____

DOOR COLORS:

- ☐ Clear (Standard)
- ☐ Red
- ☐ Other (specify) _____

TRIM PROJECTION

- ☐ Flat
- ☐ Surface-Mounted

DIMENSIONS

Model Number	Trim Style and Projection	Inside Box Dimensions H x W x D	Outside Trim Dimensions H x W*	Rough Opening H x W x D	Recommended Extinguisher Capacity
V-2709 V-2709-SM	Rec. 5/16 Surface Mtd.	27x9-1/2x4 30-1/2x13x4	30-1/2x13 30-1/2x13	28x10-1/2x4 — —	MP2-1/2,MP5,DC2-1/2, DC5, MP5-A,MP6,MP10,DC6, DC10, HT2-1/2,HT5
V-3012 V-3012-SM	Rec. 5/16 Surface Mtd.	30x12x4 33-1/2x15-1/2x4	33-1/2x15-1/2 33-1/2x15-1/2	31x13x4 — —	PW2-1/2,MP20 DC20, WC-6L,HT11,HT15-1/2

*Deduct 3/4" from HxW dimensions for cabinets with aluminum trim

Rough openings are larger for fire-rated cabinets. Please refer to Fire-rated Extinguisher Cabinet Submittal and Detail Sheet.

LARSEN'S MANUFACTURING COMPANY

7421 Commerce Lane N.E., Mpls, MN 55432

FLORIDA DIVISION: 3130 N.W. 17th Street, Ft. Lauderdale, FL 33311

Distributed by
www.FireCabinets.com

Phone: (800) 608-6568

Fax: (409) 840-5545

info@firecabinets.com

©2011 Larsen's Mfg. Co.